

■ Microphone installation

The supplied or optional HM-205* and the optional HM-195 should be connected to the transceiver using the connection cable that comes with the transceiver or the microphone.

The cable is used to operate from a longer distance. The cable connector can also be installed as a built-in plug on a cabinet or wall.

*Not supplied with some transceiver versions.

To operate from even longer distances, the optional 6 meter long OPC-999 or OPC-1541 extension cable can be used between the transceiver and the OPC-1000 or OPC-1540. Up to two OPC-999 or OPC-1541 can be added.


- OPC-999: For the HM-205
- OPC-1541: For the HM-195

◇ Installation


- ① Insert the connection cable connector into the microphone connector or the command microphone jack, and tighten the nut.
- ② To use the cable connector as a wall socket, install it as described below.
- ③ Using the mounting base as a template, carefully mark the holes where the cable and three screws will be fastened.
- ④ Drill holes at these marks.

- ⑤ Install the mounting base using the supplied screws, as shown below.

• HM-205

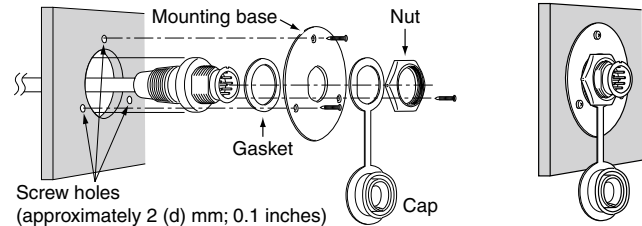

• HM-195

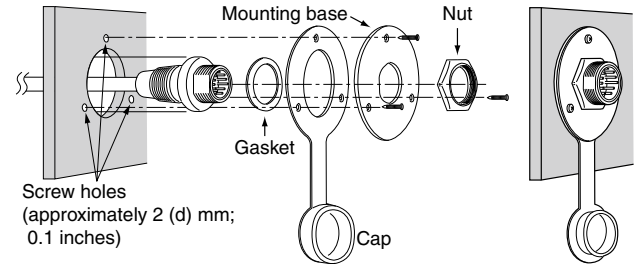

American Communication Systems

Discover the Power of Communications™

<http://www.ameradio.com>



CONNECTIONS AND MAINTENANCE

• HM-195

• HM-205

