

QUICK START GUIDE

STARBEAM Starlink Mini Rapid Deployment Kit

SAT-SB-00512



The STARBEAM Starlink Mini Rapid Deployment Kit is a self-contained mobile internet solution designed for fast, reliable connectivity in remote or emergency environments.

Housed in a rugged wheeled case, it includes a long-life power station, custom foam insert to protect components, and everything required to deploy your Starlink Mini unit quickly. Your Starlink Mini dish offers up to 50m of Wi-Fi range and the Bluetti power bank offers a runtime for of 35+ hours, enabling WiFi calling on your phone and high speed internet access anywhere the dish can see the sky.

Kit Includes


- All-Terrain Rolling Case with Custom Foam Protective Insert
- STARBEAM Starlink Mini 20V DC 5m USB-C Power Cable
- STARBEAM Starlink Mini Clamp Pole Mount
- STARBEAM Quick Start Guide
- Bluetti AC70P Power Station
- AC Charging Cable
- Car Charging Cable
- Solar Charging Cable
- Power Station User Manual

All-Terrain Rolling Case

Rated to IP65, the rolling case will protect the power station and Starlink Mini from rain and dust. The telescopic handle detaches to fit the case under the tonneau cover of most utes. Lock points on both sides of the case enable you to secure the case using padlocks.


Bluetti Power Station

Please connect the power station to power using the AC power cord and fully charge before using. Once connected to the power, the LED display will come on and when fully charged 100% will be displayed.

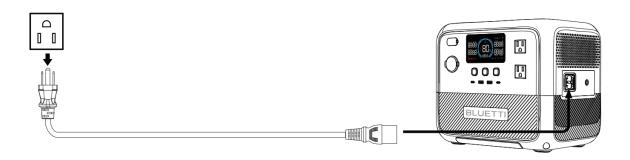

You can operate the power station whilst in the case, remove from case for ventilation in hot environments. The power station is not weather proof.

Refer to the included Bluetti setup guide for full instructions on how to charge, setup and use your new power station.



Power ON () Hold power button for 2 seconds

Power OFF ()
Hold power button for 2 seconds

Turn On/Off Display ∪ Press power button

Accessory Storage

The trolley case comes with several storage compartments to securely house all your Starlink Mini and Bluetti Power Station accessories.



Setup Instructions

- 1) Mount Starlink Mini
 - Attach the Mini Pipe Adapter that comes with your Starlink Mini to your Mini dish.
 - Mount your Starlink Mini dish on top of the extendable handle on the rolling case using the STARBEAM Starlink Mini Clamp Pole Mount.



2) Powering Starlink Mini


- Plug the STARBEAM Starlink Mini 20V DC 5m USB-C Power Cable into the Starlink Mini dish power port and the other end into one of the 'USB-C 100W' ports on the Bluetti Power Station
- Press the Power button on the Bluetti Power Station for 2 seconds to power on.



3) Starlink Mini Setup

- -Once the Starlink Mini dish has been powered, open the Starlink App
- Follow the instructions in the Starlink Mini setup guide
- Ensure your Mini dish has a clear view of the sky and trees or buildings are not

obstructing the required 110 $^{\circ}$ field of view. For optimal setup angle the dish on a 20 $^{\circ}$ angle by adjusting the pole clamp mount.

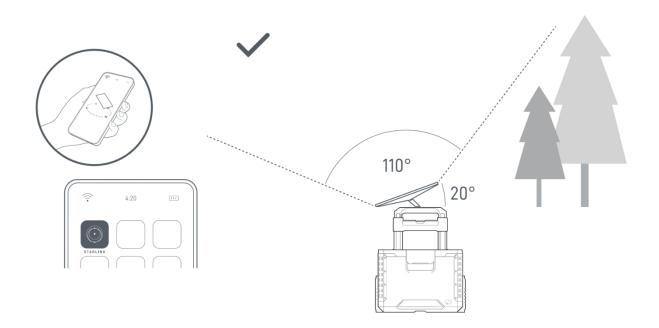

Technical Support

For support please contact our team:

Powertec Telecommunications Pty Ltd 16/511 Olsen Ave Southport Qld 4215 Ph: 07 5577 0500

E: support@powertec.com.au
W: www.powertec.com.au